

OPTIKA®

B A L A N C E S
I T A L Y



LABORATORY ELECTRONIC BALANCES



OPTIKA[®]

I T A L Y

In 1971 **OPTIKA** was founded by a physics teacher with great capabilities in combining design skills with teaching sensitivity. In 1990's the second generation started to manufacture microscopes. The company is growing fast, passing from few employees to more than 60.

A team of physicists, chemists, biologists and scientists work to meet market demands by designing and producing durable, user-friendly scientific lab equipment.

Nowadays **OPTIKA** is a leading manufacturer and supplier of scientific instruments for educational, laboratory, industrial and medical use. Our mission is driven by the desire to exceed customers' expectations and provide our selected distribution network with valuable products.



SemiMicro Touchscreen Balances	
SemiMicro Touchscreen TS and TSI resolution 0,01mg	8-9
Analytical Touchscreen Balances	
Analytical Touchscreen TS and TSI resolution 0,1mg	10-11
Precision Touchscreen Balances	
Precision Touchscreen TS and TSI resolution 0,001g - 0,01g - 0,1g	12-13
SemiMicro Balances	
SemiMicro SM and SMG resolution 0,01mg	14-15
Analytical Balances	
Analytical A and AG resolution 0,0001g	16-17
Analytical B and BG resolution 0,0001g	18-19
Precision Balances	
Precision C and CH resolution 0,001g	20-21
Precision CG and CGH resolution 0,001g	22-23
Precision D and DG resolution 0,01g	24-25
Precision E and EH resolution 0,001g	26-27
Precision EG and EGH resolution 0,001g	28-29
Precision F and FG resolution 0,01g	30-31
Precision G and GG resolution 0,1g	32-33
Precision H resolution 0,001g	34
Precision I resolution 0,01g	35
Precision L resolution 0,1g	36
Precision M resolution 0,01g - 0,1g	37
Moisture Analyzers	
Moisture analyzers TG resolution 0,0001g - 0,001g - 0,01g	38-39
Moisture analyzers T GRAPHIC resolution 0,0001g - 0,001g - 0,01g	40
Jewelry Balances	
Jewelry balances JW resolution 0,001ct - 0,001g - 0,01g	42
High Capacity Balances	
High Capacity N resolution 0,1g - 0,2g - 0,5g - 1g	43-44
TS-IDens - Balance for Density Index	
TS-IDens - Balance for Density Index resolution 0,1g - 0,2g - 0,5g - 1g	45
Accessories	47
Certified weights	52

Legend

- 
Electromagnetic Force Restoration. Coil in a permanent magnet for the the most accurate weighings
- 
High Resolution Load Cell. Strain gauge measure the deformation as change in electrical resistance
- 
RS232 Data Interface. To connect the balance to printer, PC, peripheral devices.
- 
Measuring Units. Select the measuring unit that balance will use to display weight
- 
Piececounting. Function to count identical items, reference quantities are selectable.
- 
Checkweighing. Upper and lower limits can be set individually, for dosing and portioning.
- 
Percentual Weighing. Function calculates the variation of a sample from reference value (100%)
- 
Totalization Function. Measures cumulative weight of multiple items. Shows total and current weight
- 
Animal Weighing. Accurate readings under unstable conditions such moving laboratory animals.
- 
Density Determination. This function accurately determines density of a solid object or a liquid
- 
Max Load (Peak hold). This function retains the peak value in a series of consecutive weights
- 
GlP Setup. Allows storing identification data of balance, project and user. Date and Time
- 
Date & Time. Balance shows current date and time
- 
Multi Language. Several languages can be selected from the menu of the balance
- 
Formulation. Allows setting recipes with name and tolerances for each ingredient. Automatic reportioning
- 
Suspended Weighing. A support with hook can be loaded on the underside of the balance
- 
Initial verification. According to 2014/31/EU available for balance with EC/(OIML) Type approval
- 
Accumulator. Balance has internal accumulator or can be used with optional external accumulator
- 
Battery Operating. Balance can work using AA batteries
- 
Statistics Function. Shows Min, Max, Sum, Average, Standard deviation
- 
Gross-Net-Tare. Function shows simultaneously gross, net weight and tare.
- 
Database. Internal database to store data and drying methods
- 
Textile Function. Determines the title of a thread, measuring units: Tex, Td, Nm, Nc.
- 
Drying Modes: different temperature profiles are available for drying process
- 
Infrared Sensors. Touchless, to call TARE or PRINT functions without touching the balance
- 
Touchscreen Display. 5 inch resistive display, user friendly, easy to use and intuitive.
- 
LCD Display. Standard 8 digit LCD display with backlight
- 
Graphic Display Text/graphical LCD dot matrix display with backlight.
- 
Ioniser. Integrated ioniser on the back of the balances
- 
Bluetooth. It is possible to connect bluetooth devices
- 
USB interface. It is possible to connect a usb pendrive
- 
Graph. Real time drying process graph visualization
- 
Password. User profile can be password protected
- 
Memory. It is possible to store up to 5 different drying programs

OPTIKA quick finder

Resolution	Weighing Range	Family Name	Page	M Verification	Internal Calibration	External Calibration	Windshield
0,01mg	42g...220g	TS - TSI	8-9		■		■
0,01mg	42g...220g	SM	14		■		■
0,01mg	42g...220g	SMG	15		■		■
0,1mg	220g...610g	TS - TSI	10-11		■		■
0,1mg	410g...610g	A	16		■		■
0,1mg	410g...610g	AG	17		■		■
0,1mg	120g...310g	B	18	□	□	■	■
0,1mg	120g...310g	BG	19	□	□	■	■
0,001g	210g...1000g	TS	12-13		■	■	□
0,001g	520g...1200g	C	20	□	□	■	□
0,001g	520g...1200g	CH	21	□	□	■	■
0,001g	520g...1200g	CG	22	□	□	■	□
0,001g	520g...1200g	CGH	23	□	□	■	■
0,001g	160g...420g	E	26		□	■	□
0,001g	160g...420g	EG	28		□	■	□
0,001g	160g...420g	EH	27		□	■	■
0,001g	160g...420g	EGH	29		□	■	■
0,001g	120g...420g	H	34			■	■
0,001ct / 0,001g - 0,01g	330g...4200g	JW	42		▲	■	▲
0,01g	3100g...6200g	TS	12-13		■	■	
0,01g	2200g...8200g	D	24	□	□	■	
0,01g	2200g...8200g	DG	25	□	□	■	
0,01g	1000g...5200g	F	30	□	□	■	
0,01g	1000g...5200g	FG	31	□	□	■	
0,01g	620g...4200g	I	35			■	
0,01g	200g...420g	M	37			■	
0,01g/0,1g	8kg...20kg	TS	12-13			■	
0,1g	4500g...20000g	G	32			■	
0,1g	4500g...20000g	GG	33			■	
0,1g	3200g...6500g	L	36			■	
0,1g	1000g...2200g	M	37			■	
0,1g-1g	8000g...32000g	N	43-44			■	

Moisture Balances

Resolution	Weighing Range	Family Name	Page	Thermometer Calibration	Halogen Infrared Lamp
0,1mg	60g	TG	38-39	□	■
0,1mg	60g	T GRAPHIC	40-41	□	■
0,001g	160g	TG	38-39	□	■
0,001g	160g	T GRAPHIC	40-41	□	■
0,01g	60g	TG	38-39	□	■
0,01g	60g	T GRAPHIC	40-41	□	■

(■ = Standard □ = Optional ▲ = Only For Some Models)


OPTIKA quick finder

Lcd Display	Graphic Display	Touch Screen display	Integrated Ioniser	Rs232	Units	Glp	Multi Language	Hook	Battery / Battery Pack
		■	▲	■	■	■	■		
■			▲	■	■				
	■		▲	■	■	■	■		
		■	▲	■	■	■	■		
■			▲	■	■				
	■		▲	■	■	■	■		
■			▲	■	■				
	■		▲	■	■	■	■		
		■		■	■	■	■	▲	
■				■	■			▲	
■				■	■			■	
	■			■	■	■	■	■	
	■			■	■	■	■	■	
■				■	■			▲	□
	■			■	■	■	■	▲	□
■				■	■			▲	□
	■			■	■	■	■	▲	□
■				■	■				□
■				■	■			■	
		■		■	■	■	■	□	
■				■	■			■	
	■			■	■	■	■	■	
■				■	■			▲	□
	■			■	■	■	■	▲	□
■				■	■			■	□
■					■				□
		■		■	■	■	■	■	
■				■	■			■	□
	■			■	■	■	■	■	□
■				■	■			■	□
■				■	■			■	□

Graphic Display	Touch Screen Display	Rs232	Units	Glp	Multi Language	Internal Database, Save results	Password protection
	■	■	■	■	■	■	■
■		■	■	■	■		
	■	■	■	■	■	■	■
■		■	■	■	■		
	■	■	■	■	■	■	■
■		■	■	■	■		



TS semi-micro balances are the top level, most innovative and advanced series by OPTIKA. Equipped with large 5" color touch screen display, it gives an user-friendly access to all the balance's advanced applications and internal databases. The user has easy and intuitive access to all the functions thanks to the icon-driven menus. This means more efficiency, productivity and interactivity. The TSI models are equipped with an integrated ioniser on the back of the balance with the purpose to neutralize static electricity on charged samples like plastic parts, containers or films for acquiring the most accurate results. A double case structure protects the heart of the balance: an aluminum inner case and a composite plastic external case. The many on-board functions already included, up to 6 operating languages, the large 5" inch display and the RS232 serial output close the circle of a complete product, reliable and truly convenient.



Features

- Electromagnetic force restoration weighing system
- Highly integrated weighing cell
- Automatic internal calibration
- 5" Touch-screen Display 800x480
- RS232 serial interface
- Selectable Measuring units
- Internal Database
- GLP
- Multi Languages (EN-DE-FR-IT-SP-PT)
- Multi-user with password protection
- USB port for import/export database data
- Advanced piececounting function with Statistics report
- Textile function to measure fibers with Statistics report
- Advanced Density function, with density index (DI) calculation
- Formulation (Recipe)
- Checkweighing
- Percentual weighing
- Weights adding
- Animal weighing
- Max load determination (Peak hold)
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed.

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (mg)	Linearity (mg)	Response time (sec.)
TS-SM425i	42	0,01	Ø 80	0,02	± 0,05	≤ 6
TSI-SM425i	42	0,01	Ø 80	0,02	± 0,08	≤ 6
TS-SM105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
TSI-SM105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
TS-SM1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
TSI-SM1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
TS-SM2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
TSI-SM2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
TS-SM22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
TSI-SM22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6



TSI models equipped with integrated ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

Balance technical data

- Span drift (+ 10...+ 30 °C): +/- 2ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA
- Net Weight: 6,7 Kg
- Net Weight -ION models: 7,2 Kg

Ioniser technical data


- Operation modes: 2 minutes or continuously for max 8 hours
- Ozone concentration: 0-0.05 ppm (2cm from ion source)
- Distance sample-ion source: about 5-40 cm
- Discharge time: 9s/5cm, 13s/10cm
- Ambient conditions: 0-50°C, 20-80% air humidity (non-condensing)
- Ioniser Power supply: IN AC 100-240V 50/60Hz, OUT DC 12V, 500mA

Accessories


- Portable ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- USB pendrive 8 Gigabyte (CNS020)
- Stylus pen for touchscreen (CNS021)
- Factory Calibration certificate (CNS0333)




Main functions page for easy working

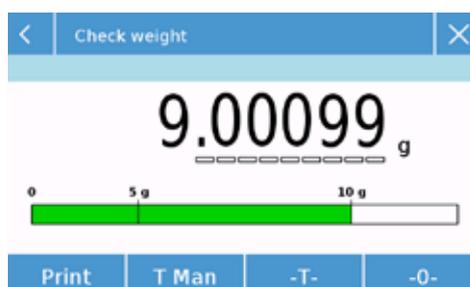

Live color indication for check weighing

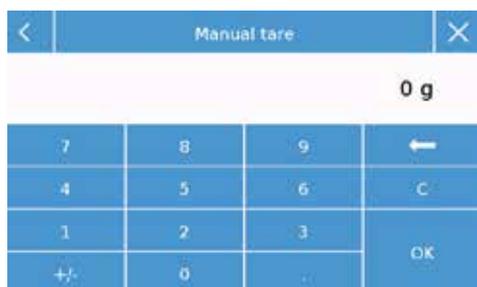

Manual tare input

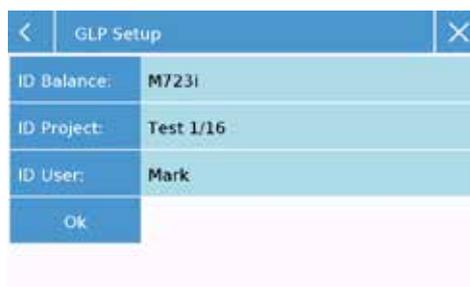

Clear and easy input for GLP function



TS analytical balances are the most innovative and advanced series by OPTIKA. Equipped with large 5" color touch screen display, it gives a user-friendly access to all the balance's advanced applications and internal databases. The user has easy and intuitive access to all the functions thanks to the icon-driven menus. This means more efficiency, productivity and interactivity. The TSI models are equipped with an integrated ioniser on the back of the balance with the purpose to neutralize static electricity on charged samples like plastic parts, containers or films for acquiring the most accurate results. A double case structure protects the heart of the balance: an aluminum inner case and a composite plastic external case. The many on-board functions already included, up to 6 operating languages, the large 5" inch display and the RS232 serial output close the circle of a complete product, reliable and truly convenient.



Features

- Electromagnetic force restoration weighing system
- Highly integrated weighing cell
- Automatic internal calibration
- 5" Touch-screen Display 800x480
- RS232 serial interface
- Selectable Measuring units
- Internal Database
- GLP
- Multi Languages (EN-DE-FR-IT-SP-PT)
- Multi-user with password protection
- USB port for import/export database data
- Advanced piececounting function with Statistics report
- Textile function to measure fibers with Statistics report
- Advanced Density function, with density index (DI) calculation
- Formulation (Recipe)
- Checkweighing
- Percentual weighing
- Weights adding
- Animal weighing
- Max load determination (Peak hold)
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (mg)	Linearity (mg)	Response time (sec.)
TS-B214Ai	220	0,1	Ø 80	0,1	± 0,0003	≤ 4
TSI-B214Ai	220	0,1	Ø 80	0,1	± 0,0003	≤ 4
TS-B314Ai	310	0,1	Ø 80	0,1	± 0,0003	≤ 4
TSI-B314Ai	310	0,1	Ø 80	0,1	± 0,0003	≤ 4
TS-A514i	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
TSI-A514i	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
TS-A614i	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4
TSI-A614i	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4



TSI models equipped with integrated ioniser on the back of the balance.
The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

Balance technical data

- Span drift (+ 10...+ 30 °C): +/- 2ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA
- Net Weight: 6,7 Kg
- Net Weight -ION models: 7,2 Kg

Ioniser technical data


- Operation modes: 2 minutes or continuously for max 8 hours
- Ozone concentration: 0-0.05 ppm (2cm from ion source)
- Distance sample-ion source: about 5-40
- Discharge time: 9s/5cm, 13s/10cm
- Ambient conditions: 0-50°C, 20-80% air humidity (non-condensing)
- Ioniser Power supply: IN AC 100-240V 50/60Hz, OUT DC 12V, 500mA

Accessories


- Portable ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- USB pendrive 8 Gigabyte (CNS020)
- Stylus pen for touchscreen (CNS021)
- Factory Calibration certificate (CNS0333)



Main functions page for easy working

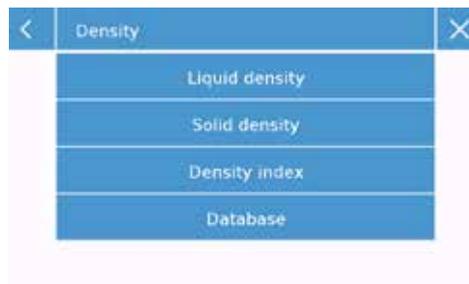


Easy selection for density function

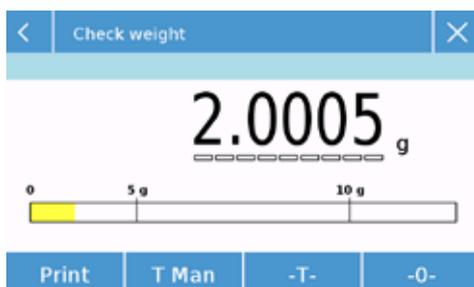

Live color indication for check weighing



Main page with easy access to the menus

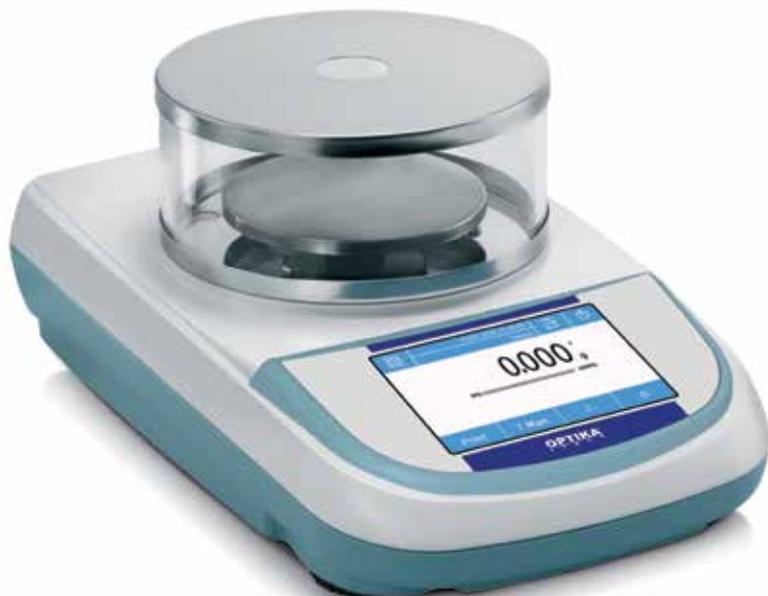

TS precision balances are the most innovative and advanced series by OPTIKA. Equipped with large 5" color touch screen display, it gives an user-friendly access to all the balance's advanced applications and internal databases. The user has easy and intuitive access to all the functions thanks to the icon-driven menus. This means more efficiency, productivity and interactivity. A double case structure protects the heart of the balance: an aluminum inner case and a composite plastic external case. With resolution from 0,001g to 0,1g this serie offers a wide choice of models for many application with the simplicity of a touch screen interface. The many on-board functions already included, up to 6 operating languages, the large 5" inch display and the RS232 serial output close the circle of a complete product, reliable and truly convenient.



Features

- Electromagnetic force restoration weighing system (for models TS-C / TS-D)
- Highly integrated weighing cell (for models TS-C / TS-D)
- High resolution load cell weighing system (for models TS-E / TS-F/ TS-G)
- Automatic internal calibration (for models TS-C / TS-D / TS-E / TS-F)
- 5" Touch-screen Display 800x480
- RS232 serial interface
- Selectable Measuring units
- Internal Database
- GLP
- Multi Languages (EN-DE-FR-IT-SP-PT)
- Multi-user with password protection
- USB port for import/export database data
- Advanced piececounting function with Statistics report
- Textile function to measure fibers with Statistics report
- Advanced Density function, with density index (DI) calculation
- Formulation (Recipe)
- Checkweighing
- Percentual weighing
- Weights adding
- Animal weighing
- Max load determination (Peak hold)
- Hook for below weighing (for some models)
- Round glass windshield

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
TS-E203i	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
TS-C523i	520	0,001	Ø 110	0,001	± 0,002	≤ 2
TS-C723i	720	0,001	Ø 110	0,001	± 0,002	≤ 2
TS-CH1203i	1200	0,001	Ø 110	0,001	± 0,003	≤ 3
TS-CH2103i	2100	0,001	Ø 110	0,001	± 0,003	≤ 3
TS-F2202i	2200	0,01	Ø 160	0,01	± 0,03	≤ 3
TS-D4202i	4200	0,01	Ø 160	0,01	± 0,04	≤ 4
TS-D6202i	6200	0,01	Ø 160	0,01	± 0,03	≤ 3

External Calibration

TS-D8202	8200	0,01	Ø 160	0,01	± 0,04	≤ 3
TS-G10001	10000	0,1	175x195	0,05	± 0,2	≤ 2
TS-G20001	20000	0,1	175x195	0,1	± 0,4	≤ 4

⁽¹⁾ Only TS-C523i, TS-C723i, TS-CH1203i, TS-CH2103i, TS-D4202i, TS-D6202i, TS-D8202

⁽²⁾ Only TS-E203i, TS-F2202i, TS-G10001, TS-G20001



Balance technical data

- Span drift (+ 10...+ 30 °C): +/- 2ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber diameter-Height (mm) 0,001g res. models: 150x70
- Power supply M models 110-230Vac, 50/60Hz; output 24V 500mA 13VA
- Power supply L models 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 6,7 Kg

Accessories


- Portable ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- USB pendrive 8 Gigabyte (CNS020)
- Stylus pen for touchscreen (CNS021)
- Factory Calibration certificate (CNS0333)



Main page with easy access to the menus



Qwerty touch keypad for easy input

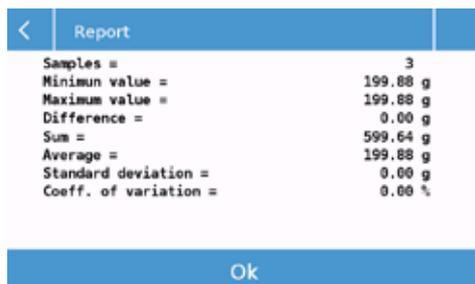

Easy reading reports



Live color indication for check weighing




Optional Ioniser model ION-A15




The OPTIKA series of SemiMicro SM balances is equipped with the new highly integrated electromagnetic cell, with automatic internal calibration on all models, they are characterized by a high level of precision and repeatability.

As in the tradition of OPTIKA products, SemiMicro SM balances deliver an excellent performance/price ratio.

I-Model

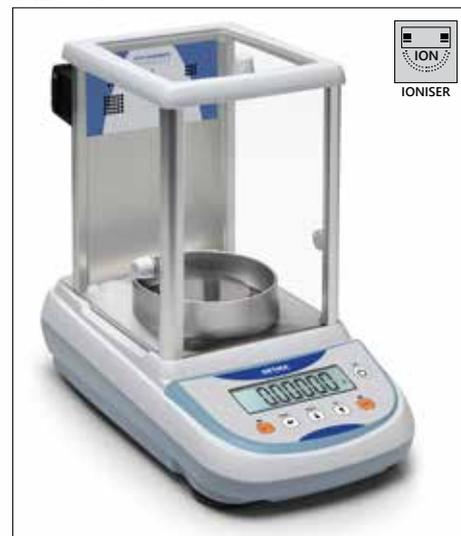

I-models equipped with integrated ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.



Features

- Electromagnetic force restoration weighing system
- Highly integrated weighing cell
- Automatic internal calibration
- Efficient filtering to deliver quick and accurate results
- LCD with backlight with adjustable contrast
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover for keypad

Balance Technical data

- Span drift (+ 10...+ 30 °C): +/- 2ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Dimensions of external electronics box LxWxH: 175x105x50 (mm), weight 500g
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA
- Net Weight: 7Kg

Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (mg)	Linearity (mg)	Response time (sec.)
SM425i	42	0,01	Ø 80	0,05	± 0,05	≤ 6
I-SM425i	42	0,01	Ø 80	0,05	± 0,05	≤ 6
SM625i	62	0,01	Ø 80	0,05	± 0,08	≤ 6
I-SM625i	62	0,01	Ø 80	0,05	± 0,08	≤ 6
SM105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
I-SM105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
SM1245Di	42/120	0,01/0,1	Ø 80	0,02 / 0,1	± 0,05 / ± 0,2	≤ 6
I-SM1245Di	42/120	0,01/0,1	Ø 80	0,02 / 0,1	± 0,05 / ± 0,2	≤ 6
SM1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
I-SM1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
SM2245Di	42/220	0,01/0,1	Ø 80	0,02 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SM2245Di	42/220	0,01/0,1	Ø 80	0,02 / 0,1	± 0,1 / ± 0,2	≤ 6
SM2265Di	62/220	0,01/0,1	Ø 80	0,03 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SM2265Di	62/220	0,01/0,1	Ø 80	0,03 / 0,1	± 0,1 / ± 0,2	≤ 6
SM2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SM2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
SM22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SM22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6

Accessories


- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT , with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)

⁽¹⁾ If connected to optional STAT printer (CNS022)




Optional Ioniser model ION-A15

All SMG models are equipped with the large graphic display for easy operations.

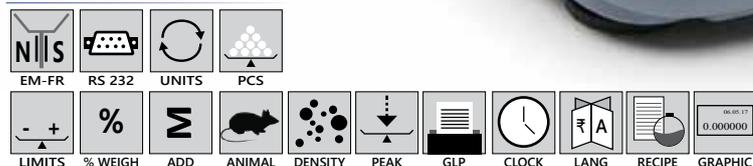

I-Model

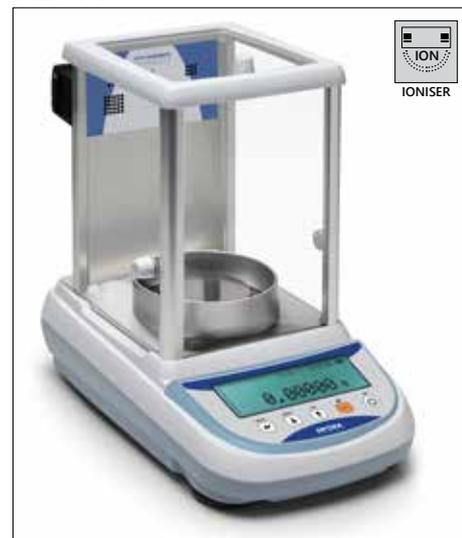

I- models equipped with integrated ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (mg)	Linearity (mg)	Response time (sec.)
SMG425i	42	0,01	Ø 80	0,05	± 0,05	≤ 6
I-SMG425i	42	0,01	Ø 80	0,05	± 0,05	≤ 6
SMG625i	62	0,01	Ø 80	0,05	± 0,08	≤ 6
I-SMG625i	62	0,01	Ø 80	0,05	± 0,08	≤ 6
SMG105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
I-SMG105i	102	0,01	Ø 80	0,05	± 0,08	≤ 6
SMG1245Di	42/120	0,01/0,1	Ø 80	0,02 / 0,1	± 0,05 / ± 0,2	≤ 6
I-SMG1245Di	42/120	0,01/0,1	Ø 80	0,02 / 0,1	± 0,05 / ± 0,2	≤ 6
SMG1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
I-SMG1265Di	62/120	0,01/0,1	Ø 80	0,03 / 0,1	± 0,08 / ± 0,2	≤ 6
SMG2245Di	42/220	0,01/0,1	Ø 80	0,02 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SMG2245Di	42/220	0,01/0,1	Ø 80	0,02 / 0,1	± 0,1 / ± 0,2	≤ 6
SMG2265Di	62/220	0,01/0,1	Ø 80	0,03 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SMG2265Di	62/220	0,01/0,1	Ø 80	0,03 / 0,1	± 0,1 / ± 0,2	≤ 6
SMG2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SMG2285Di	82/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
SMG22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6
I-SMG22105Di	102/220	0,01/0,1	Ø 80	0,05 / 0,1	± 0,1 / ± 0,2	≤ 6

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)

Features

- Electromagnetic force restoration weighing system
- Highly integrated weighing cell
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover

Ioniser Technical data

- Operation modes: 2 minutes or continuous for max 8 hours
- Ozone concentration: 0-0.05 ppm (2cm from ion source)
- Distance sample-ion source: about 5-40 cm
- Discharge time: 9s/5cm, 13s/10cm
- Ambient conditions: 0-50°C, 20-80% air humidity (non-condensing)
- Ioniser Power supply: IN AC 100-240V 50/60Hz, OUT DC 12V, 500mA




Optional Ioniser model ION-A15



A series family includes Analytical Balances that reach the highest measuring performance. They are equipped with a highly integrated weighing cell whose benefits are high stability against temperature changes and time, quick response thanks to reduced mass and overall reduction of total number of components. A balances have -as standard- automatic internal calibration that allows always precise measurements, practically independent from environment temperature changes. All models are equipped with backlit LCD display, a glass draft windshield that protects a large volume inner measuring chamber. Each balance is equipped with RS232 output interface.

I Model

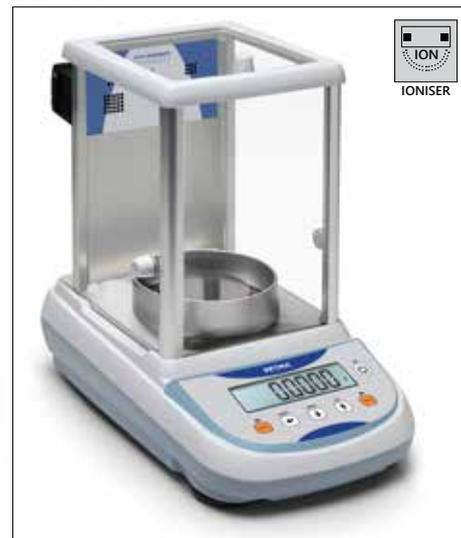

I- models equipped with integrated Ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.



Features

- Electromagnetic force restoration weighing system
- Highly integrated weighing
- Automatic internal calibration
- Efficient filtering
- LCD with backlight with adjustable contrast
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover

Balance Technical data

- Span drift (+ 10...+ 30 °C): +/- 2ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Dimensions of external electronics box LxWxH: 175x105x50 (mm), weight 500g
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA
- Net Weight: 7,2Kg
- Net Weight I-model: 7,6Kg

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (mg)	Linearity (g)	Response time (sec.)
A414Ai	410	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 410g	± 0,0005	≤ 4
I-A414Ai	410	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 410g	± 0,0005	≤ 4
A514Ai	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
I-A514Ai	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
A614Ai	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4
I-A614Ai	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4



Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ If connected to optional STAT printer (CNS022)




Optional Ioniser model ION-A15

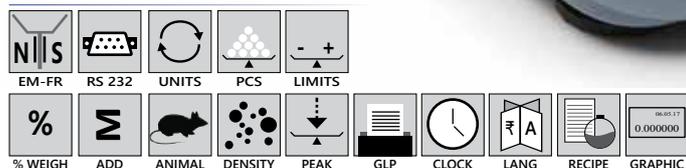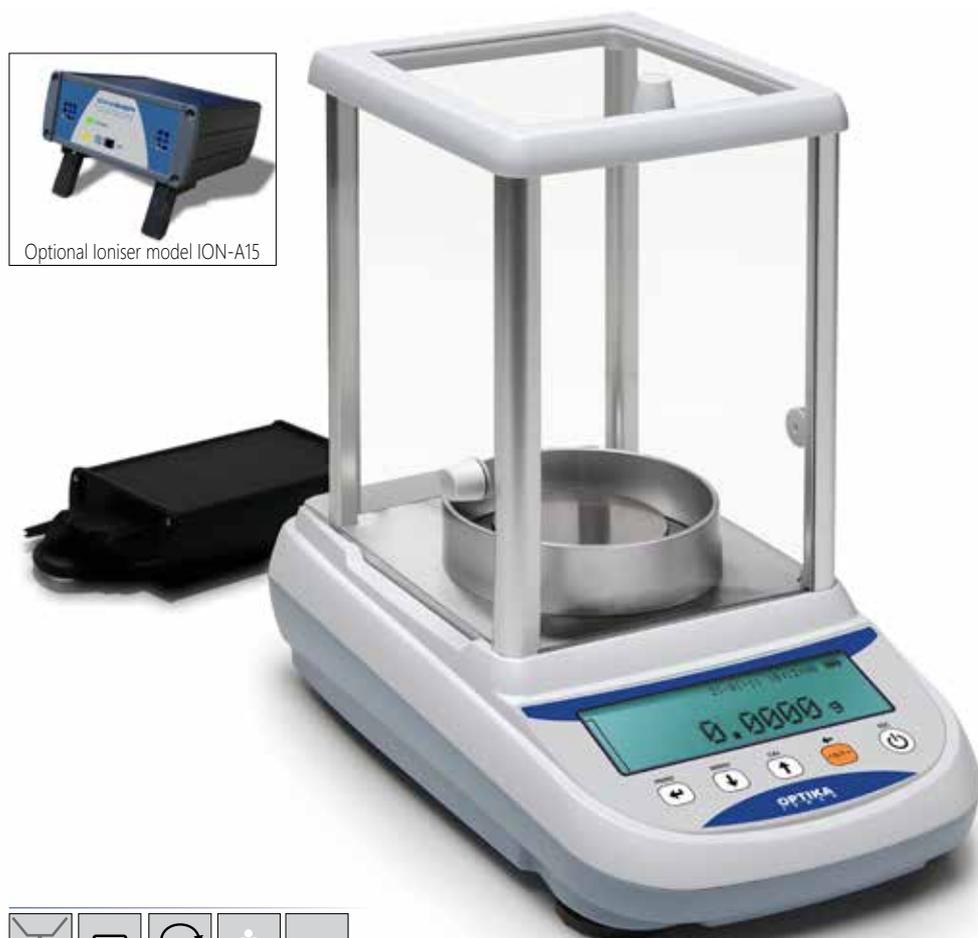

AG models are equipped with a large graphic display for easy reading and user friendly operations with many functions. Others features are a backlit large graphic display, a glass draft windshield that protects a large volume inner measuring chamber and RS232 output interface.

I Model

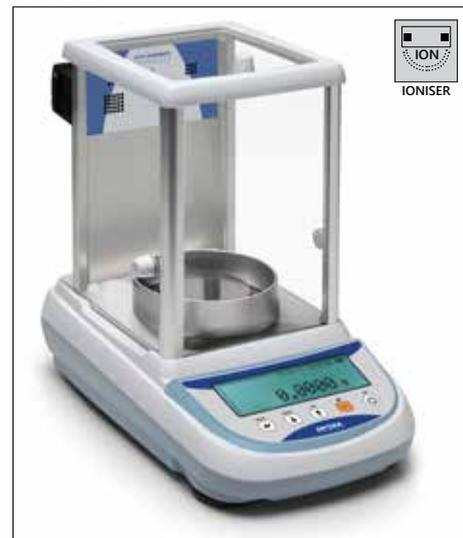

I- models are equipped with integrated ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
AG414Ai	410	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 410g	± 0,0005	≤ 4
I-AG414Ai	410	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 410g	± 0,0005	≤ 4
AG514Ai	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
I-AG514Ai	510	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 510g	± 0,0005	≤ 4
AG614Ai	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4
I-AG614Ai	610	0,1	Ø 80	0,1mg if weight ≤ 220g 0,3mg from 220g to 310g 0,35mg from 310g to 610g	± 0,0005	≤ 4

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)

Features

- Electromagnetic force restoration weighing system.
- Highly integrated weighing.
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients.
- Large Graphic display allows efficient and easy operations.
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number.
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed.
- Plastic protection cover

Ioniser Technical data

- Operation modes: 2 minutes or continuously for max 8 hours
- Ozone concentration: 0-0.05 ppm (2cm from ion source)
- Distance sample-ion source: about 5-40 cm
- Discharge time: 9s/5cm, 13s/10cm
- Ambient conditions: 0-50°C, 20-80% air humidity (non-condensing)
- Ioniser Power supply: IN AC 100-240V 50/60Hz, OUT DC 12V, 500mA




Optional Ioniser model ION-A15



A Top Quality series of Analytical Balances that combine elegance with highly reliable measuring performance. Double case structure, ergonomic keypad, external or internal calibration. Many embedded advanced features make them perfect for use in laboratory, research departments, formulation and quality control applications.

I Model



I- models equipped with integrated Ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover

Technical data

- Span drift (+ 10...+ 30 °C): +/- 3ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 6,3Kg

Internal calibration models

Net Weight: 6,6Kg

I-models net weight: 7,0Kg

External Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽¹⁾ M)
B124A	120	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
B164A	160	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
B214A	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
B254A	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽¹⁾ M)
B124Ai	120	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
B164Ai	160	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
B214Ai	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
I-B214Ai	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
B254Ai	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
I-B254Ai	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
B314Ai	310	0,1	Ø 80	0,0001	± 0,0004	≤ 4	–
I-B314Ai	310	0,1	Ø 80	0,0001	± 0,0004	≤ 4	–

Accessories


- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Communication KIT for balances (CNS0476)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽¹⁾)

⁽¹⁾To order Verification please add -M to name, e.g. B214Ai-M

⁽²⁾If connected to optional STAT printer (CNS022)




Optional Ioniser model ION-A15

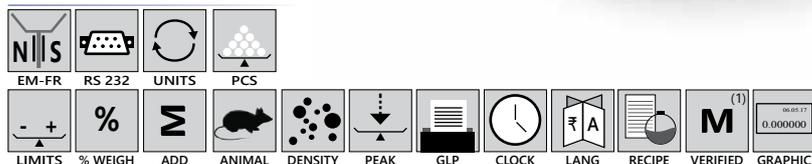

BG models are equipped with a large graphic display for easy reading and user friendly operations with many functions. BG balances have an extensive recipe database, GLP and many embedded advanced features make them perfect for use in laboratory, research departments, compounds formulation and quality control applications.

I Model

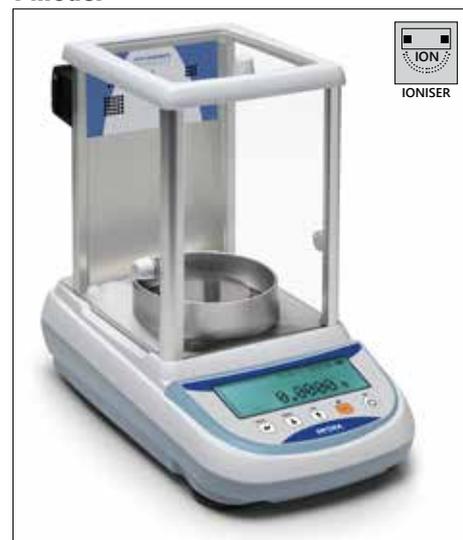

I- models equipped with integrated Ioniser on the back of the balance. The ioniser has two way of operating: 2 minutes or continuously for max 8 hours.

External Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽¹⁾)M
BG124A	120	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
BG164A	160	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
BG214A	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
BG254A	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–

Automatic Internal Calibration

Model	Capacity (g)	Resolution (mg)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽¹⁾)M
BG124Ai	120	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
BG164Ai	160	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
BG214Ai	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
I-BG214Ai	220	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
BG254Ai	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	M
I-BG254Ai	250	0,1	Ø 80	0,0001	± 0,0003	≤ 4	–
BG314Ai	310	0,1	Ø 80	0,0001	± 0,0004	≤ 4	–
I-BG314Ai	310	0,1	Ø 80	0,0001	± 0,0004	≤ 4	–

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽¹⁾)

⁽¹⁾To order Verification please add -M to name, e.g. B214Ai-M

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover

Ioniser Technical data

- Operation modes: 2 minutes or continuously for max 8 hours
- Ozone concentration: 0-0.05 ppm (2cm from ion source)
- Distance sample-ion source: about 5-40 cm
- Discharge time: 9s/5cm, 13s/10cm
- Ambient conditions: 0-50°C, 20-80% air humidity (non-condensing)
- Ioniser Power supply: IN AC 100-240V 50/60Hz, OUT DC 12V, 500mA

External calibration models

Net Weight: 6,3Kg

Internal calibration models

Net Weight: 6,6Kg

I-models net weight: 7,0Kg




A Top Quality series of Precision Balances that combine elegance with highly reliable measuring performance. Double case structure, ergonomic keypad, external or internal calibration. Many embedded advanced features make them perfect for use in laboratory, research departments, formulation and quality control applications.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Round glass windshield
- Plastic protection cover
- Under hook weighing ⁽¹⁾

Optional functions

Paper Grammage Function (CNS219)



Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x155
- Weighing chamber dimensions diameter-Height (mm): 150x70
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 4,6Kg

Internal calibration models

Net Weight: 4,9Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
C523	520	0,001	Ø 110	0,001	± 0,002	≤ 2	–
C723	720	0,001	Ø 110	0,001	± 0,002	≤ 2	–
C1003	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
C1203	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–

Internal Automatic Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
C523i	520	0,001	Ø 110	0,001	± 0,002	≤ 2	M
C723i	720	0,001	Ø 110	0,001	± 0,002	≤ 2	M
C1003i	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
C1203i	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–
C1003Di	500/1000	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M
C1203Di	720/1200	0,001/0,01	Ø 110	0,001/0,005	±0,002/±0,01	≤ 2	M

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Factory Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Not available for verified models

⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M

⁽³⁾ If connected to optional STAT printer (CNS022)



Optional Ioniser model ION-A15




CH models are equipped with a large glass draught shield.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- Plastic protection cover
- Under hook weighing ⁽¹⁾

Optional functions

Paper Grammage Function (CNS219)



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CH523	520	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CH723	720	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CH1003	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CH1203	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–

Internal Automatic Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CH523i	520	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CH723i	720	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CH1003i	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CH1203i	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CH2103i	2100	0,001	Ø 110	0,001	± 0,005	≤ 3	–
CH1003Di	500/1000	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M
CH1203Di	720/1200	0,001/0,01	Ø 110	0,001/0,005	± 0,002/± 0,01	≤ 2	M

Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 6,1Kg

Internal calibration models

Net Weight: 6,3Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for output to printer/PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Not available for verified models

⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M


⁽³⁾ If connected to optional STAT printer (CNS022)



Double case structure, ergonomic keypad. CG balances have an extensive recipe database and many embedded advanced features make them perfect for use in laboratory, research departments, formulation and quality control applications.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Round glass windshield
- Plastic protection cover
- Under hook weighing ⁽¹⁾



Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x155
- Weighing chamber dimensions diameter-Height (mm): 150x70
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 4,6Kg

Internal calibration models

Net Weight: 4,9Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CG523	520	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CG723	720	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CG1003	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CG1203	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–

Internal Automatic Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CG523i	520	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CG723i	720	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CG1003i	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CG1203i	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CG1003Di	500/1000	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M
CG1203Di	720/1200	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)

⁽¹⁾ Not available for verified models

⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M




Optional Ioniser model ION-A15



Equipped with a large glass draught shield, CGH balances have an extensive recipe database and many embedded advanced features make them perfect for use in laboratory, research departments, formulation and quality control applications.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Large glass draught shield with 3 sliding doors for easy access to the items
- Plastic protection cover
- Under hook weighing ⁽¹⁾



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CGH523	520	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CGH723	720	0,001	Ø 110	0,001	± 0,002	≤ 2	–
CGH1003	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CGH1203	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–

Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 6,1Kg

Internal calibration models

Net Weight: 6,3Kg

Internal Automatic Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
CGH523i	520	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CGH723i	720	0,001	Ø 110	0,001	± 0,002	≤ 2	M
CGH1003i	1000	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CGH1203i	1200	0,001	Ø 110	0,001	± 0,003	≤ 3	–
CGH2103i	2100	0,001	Ø 110	0,001	± 0,005	≤ 3	–
CGH1003Di	500/1000	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M
CGH1203Di	720/1200	0,001/0,01	Ø 110	0,001/0,005	± 0,001/± 0,01	≤ 2	M

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)

⁽¹⁾ Not available for verified models

⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M

Balances series D combine design with high level performance, guaranteed by the electromagnetic force restoration weighing cell. Double case structure, ergonomic keypad, external or internal calibration. Many embedded advanced features make them ideal instruments for your work in laboratory, research and quality control applications.




Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing ⁽¹⁾
- PQ models have a rectangular pan 175x195mm

Optional functions

Paper Grammage Function (CNS219)



Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 4,6Kg

Internal calibration models

Net Weight: 5,1Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
D4202	4200	0,01	Ø 160	0,01	± 0,03	≤ 2	–
D5202	5200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
D6202	6200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
D8202	8200	0,01	Ø 160	0,01	± 0,04	≤ 3	–
D5502D	800/5500	0,01/0,1	Ø 160	0,005/0,03	± 0,01/± 0,1	≤ 2	–
D5502D-PQ	800/5500	0,01/0,1	175X195	0,005/0,03	± 0,01/± 0,1	≤ 2	–

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
D4202i	4200	0,01	Ø 160	0,01	± 0,03	≤ 2	M
D5202i	5200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
D6202i	6200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
D5502Di	800/5500	0,01/0,1	Ø 160	0,005/0,03	± 0,01/± 0,1	≤ 2	M
D5502Di-PQ	800/5500	0,01/0,1	175X195	0,005/0,03	± 0,01/± 0,1	≤ 2	–
D6202Di	4000/6200	0,01/0,1	Ø 160	0,01/0,03	± 0,03/± 0,1	≤ 3	M

Accessories

- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Not available for verified models


⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M

⁽³⁾ If connected to optional STAT printer (CNS022)

DG balances have an extensive recipe database and many embedded advanced features make them ideal for your work in laboratory, research departments, formulation and quality control applications.

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Plastic protection cover
- Under hook weighing ⁽¹⁾
- PQ models have a rectangular pan 175x195mm



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
DG4202	4200	0,01	Ø 160	0,01	± 0,03	≤ 2	–
DG5202	5200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
DG6202	6200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
DG8202	8200	0,01	Ø 160	0,01	± 0,04	≤ 3	–
DG5502D	800/5500	0,01/0,1	Ø 160	0,005/0,03	± 0,01/± 0,1	≤ 2	–
DG5502D-PQ	800/5500	0,01/0,1	175X195	0,005/0,03	± 0,01/± 0,1	≤ 2	–

Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

Net Weight: 4,6Kg

Internal calibration models

Net Weight: 5,1Kg

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
DG4202i	4200	0,01	Ø 160	0,01	± 0,03	≤ 2	M
DG5202i	5200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
DG6202i	6200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
DG5502Di	800/5500	0,01/0,1	Ø 160	0,005/0,03	± 0,01/± 0,1	≤ 2	M
DG5502Di-PQ	800/5500	0,01/0,1	175X195	0,005/0,03	± 0,01/± 0,1	≤ 2	–
DG6202Di	4000/6200	0,01/0,1	Ø 160	0,01/0,03	±0,03/±0,1	≤ 3	M

Accessories

- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)

⁽¹⁾ Not available for verified models

⁽²⁾ To order Verification please add -M to name, e.g. B214Ai-M

A Top Quality series of Precision Balances that combine elegance with highly reliable measuring performance. E series balances are a synthesis of design, performance and convenience. Thanks to a sophisticated software and to a high-performance load cell, these balances deliver top performance at competitive prices. Double case structure, ergonomic keypad, external or internal calibration, ergonomic keypad, external or internal calibration. Many embedded advanced features make them perfect for your work.



Features

- High resolution load cell weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Round glass windshield
- Plastic protection cover
- Under hook weighing ⁽¹⁾

Optional functions

Paper Grammage Function (CNS219)



Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x155
- Weighing chamber dimensions diameter-Height (mm): 150x70
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 3,3Kg

Internal calibration models

Net Weight: 3,6Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
E163	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
E203	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
E303	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
E303D	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
E423	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
E163i	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
E203i	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
E303i	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
E303Di	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
E423i	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Only for external calibration model

⁽²⁾ Optional external battery pack (CNS015)

⁽³⁾ If connected to optional STAT printer (CNS022)




Features

- Large glass draught shield with 3 sliding doors for easy access to the items
- High resolution load cell weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing ⁽¹⁾

Optional functions

Paper Grammage Function (CNS219)



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EH163	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH203	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH303	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH303D	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
EH423	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EH163i	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH203i	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH303i	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EH303Di	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
EH423i	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 4,3Kg

Internal calibration models

Net Weight: 4,6Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Only for external calibration model


⁽²⁾ Optional external battery pack (CNS015)

⁽³⁾ If connected to optional STAT printer (CNS022)

All EG models are equipped with a large graphic display for easy reading and user friendly operations with many functions. Double case structure, ergonomic keypad. EG balances have an extensive recipe database and many embedded advanced features make them perfect for use in laboratory, research departments, formulation and quality control applications.

Features

- High resolution load cell weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Round glass windshield
- Plastic protection cover
- Under hook weighing ⁽¹⁾



Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x155
- Weighing chamber dimensions diameter-Height (mm): 150x70
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 3,3Kg

Internal calibration models

Net Weight: 3,6Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EG163	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG203	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG303	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG303D	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/±0,02	≤ 3
EG423	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EG163i	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG203i	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG303i	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EG303Di	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/±0,02	≤ 3
EG423i	420	0,001	Ø 110	0,001	± 0,004	≤ 4


⁽¹⁾ Only for external calibration model

⁽²⁾ Optional external battery pack (CNS015)



Features

- Large glass draught shield with 3 sliding doors for easy access to the items
- High resolution load cell weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Large Graphic display allows efficient and easy operations
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Plastic protection cover
- Under hook weighing ⁽¹⁾



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EGH163	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH203	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH303	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH303D	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
EGH423	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
EGH163i	160	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH203i	210	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH303i	310	0,001	Ø 110	0,0006	± 0,003	≤ 3
EGH303Di	150/310	0,001/0,01	Ø 110	0,0006/0,005	± 0,003/± 0,02	≤ 3
EGH423i	420	0,001	Ø 110	0,001	± 0,004	≤ 4

Technical data

- Span drift (+ 10...+ 30 °C): +/- 4ppm/°C
- Dimensions LxWxH (mm): 345x215x345
- Weighing chamber dimensions LxWxH (mm): 162x171x225
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 4,3Kg

Internal calibration models

Net Weight: 4,6Kg

Accessories


- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Only for external calibration model

⁽²⁾ Optional external battery pack (CNS015)



F Series balances are a synthesis of design, performance and convenience. Thanks to a sophisticated software and to a high-performance load cell, these balances deliver top performance at competitive prices. Double case structure, ergonomic keypad, external or internal calibration. Many embedded advanced features make them perfect for your work.

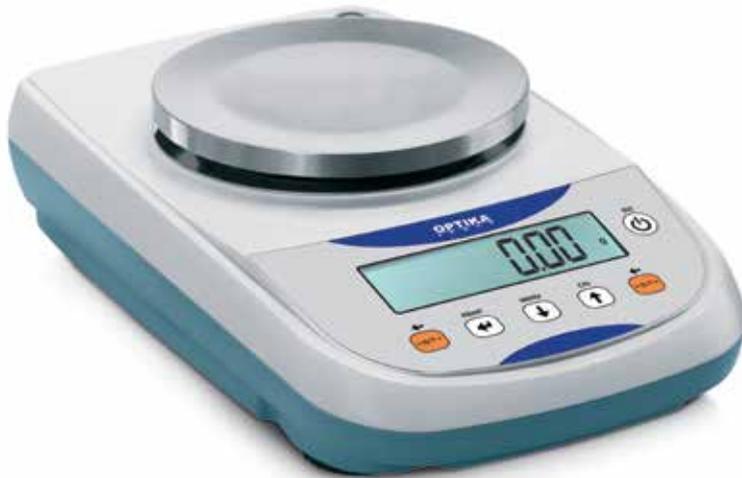


Features

- High resolution load cell weighing system
- External or automatic internal calibration
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing ⁽¹⁾

Optional functions

Paper Grammage Function (CNS219)



Technical data

- Span drift (+ 10...+ 30 °C): +/- 5ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 3,3Kg

Internal calibration models

Net Weight: 3,6Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
F1002	1000	0,01	Ø 160	0,01	± 0,02	≤ 3	–
F1502	1500	0,01	Ø 160	0,01	± 0,02	≤ 3	–
F2202	2200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
F3102	3100	0,01	Ø 160	0,01	± 0,03	≤ 3	–
F4202	4200	0,01	Ø 160	0,01	± 0,04	≤ 4	–
F5202	5200	0,01	Ø 160	0,01	± 0,04	≤ 4	–

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
F1002i	1000	0,01	Ø 160	0,01	± 0,02	≤ 3	M
F1502i	1500	0,01	Ø 160	0,01	± 0,02	≤ 3	M
F2202i	2200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
F3102i	3100	0,01	Ø 160	0,01	± 0,03	≤ 3	M
F4202i	4200	0,01	Ø 160	0,01	± 0,04	≤ 4	–

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Not available for verified models

⁽³⁾ Only for external calibration model

⁽²⁾ To order Verification please add -M to name, e.g. F1002i-M

⁽⁴⁾ Optional external battery pack (CNS015)

⁽⁵⁾ If connected to optional STAT printer (CNS022)




Optional Ioniser model ION-A15



FG balances have an extensive recipe database and many embedded advanced features make them perfect for use in laboratory, research departments, compounds formulation and quality control applications.

Features

- Large Graphic display allows efficient and easy operations
- High resolution load cell weighing system
- External or automatic internal calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Plastic protection cover
- Under hook weighing ⁽¹⁾



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
FG1002	1000	0,01	Ø 160	0,01	± 0,02	≤ 3	–
FG1502	1500	0,01	Ø 160	0,01	± 0,02	≤ 3	–
FG2202	2200	0,01	Ø 160	0,01	± 0,03	≤ 3	–
FG3102	3100	0,01	Ø 160	0,01	± 0,03	≤ 3	–
FG4202	4200	0,01	Ø 160	0,01	± 0,04	≤ 4	–
FG5202	5200	0,01	Ø 160	0,01	± 0,04	≤ 4	–

Automatic Internal Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)	Verification (optional ⁽²⁾)M
FG1002i	1000	0,01	Ø 160	0,01	± 0,02	≤ 3	M
FG1502i	1500	0,01	Ø 160	0,01	± 0,02	≤ 3	M
FG2202i	2200	0,01	Ø 160	0,01	± 0,03	≤ 3	M
FG3102i	3100	0,01	Ø 160	0,01	± 0,03	≤ 3	M
FG4202i	4200	0,01	Ø 160	0,01	± 0,04	≤ 4	–

Technical data

- Span drift (+ 10...+ 30 °C): +/- 5ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA

External calibration models

Net Weight: 3,3Kg

Internal calibration models

Net Weight: 3,6kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Portable rechargeable battery pack (CNS015)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Conformity Declaration (Verification⁽²⁾)

⁽¹⁾ Not available for verified models

⁽⁴⁾ Optional external battery pack (CNS015)


⁽²⁾ To order Verification please add -M to name, e.g. F1002i-M

⁽³⁾ Only for external calibration model

G Series balances are a synthesis of design, performance and convenience. Thanks to a sophisticated software and to a high-performance load cell, these balances deliver top performance at competitive prices. Double case structure, ergonomic keypad, maximum capacity 20Kg. Many embedded advanced features make them perfect for your work.

Features

- High resolution load cell weighing system
- External calibration
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing



Technical data

Common features

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 3,5Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
G4501	4500	0,1	175x195	0,05	± 0,1	≤ 2
G5201	5200	0,1	175x195	0,05	± 0,1	≤ 2
G6501	6500	0,1	175x195	0,05	± 0,1	≤ 2
G8001	8000	0,1	175x195	0,05	± 0,2	≤ 2
G10001	10000	0,1	175x195	0,05	± 0,2	≤ 2
G12001	12000	0,1	175x195	0,05	± 0,2	≤ 3
G16001	16000	0,1	175x195	0,08	± 0,3	≤ 3
G20001	20000	0,1	175x195	0,1	± 0,4	≤ 4

Accessories

- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Optional external battery pack (CNS015)


⁽²⁾ If connected to optional STAT printer (CNS022)

GG balances have an extensive recipe database and many embedded advanced features make them perfect for use in laboratory, industry and quality control applications.



Features

- Large Graphic display allows efficient and easy operations
- High resolution load cell weighing system
- External calibration
- Recipe database: 99 recipes can be stored, each with up to 20 ingredients
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record keeping of weight values with date, time and serial number
- Plastic protection cover
- Under hook weighing



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
GG4501	4500	0,1	175x195	0,05	± 0,1	≤ 2
GG5201	5200	0,1	175x195	0,05	± 0,1	≤ 2
GG6501	6500	0,1	175x195	0,05	± 0,1	≤ 2
GG8001	8000	0,1	175x195	0,05	± 0,2	≤ 2
GG10001	10000	0,1	175x195	0,05	± 0,2	≤ 2
GG12001	12000	0,1	175x195	0,05	± 0,2	≤ 3
GG16001	16000	0,1	175x195	0,08	± 0,3	≤ 3
GG20001	20000	0,1	175x195	0,1	± 0,4	≤ 4

Technical data

Common features

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 345x215x100
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 3,5Kg

Accessories

- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)

⁽¹⁾ Optional external battery pack (CNS015)

A fusion of design and quality, H Series balances enclose all the experience of higher class models in a small footprint portable balance. Thanks to the sophisticated software and to a high-performance load cell, these balances reach maximum capacity of 420 grams. Solid structure, ergonomic keypad and the many embedded software functions make this balance a complete product at a very competitive price.




Features

- High resolution load cell weighing system
- Small footprint
- External calibration
- LCD with backlight with adjustable contrast
- Round glass windshield
- Plastic protection cover

Optional functions

Paper Grammage Function (CNS219)



Technical data

- Span drift (+ 10...+ 30 °C): +/- 5ppm/°C
- Dimensions LxWxH (mm): 190x255x130
- Weighing chamber dimensions diameter-Height (mm): 133x70
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 1,6Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
H123	120	0,001	Ø 80	0.0008	± 0,003	≤ 3
H203	210	0,001	Ø 80	0,001	± 0,003	≤ 3
H303	310	0,001	Ø 80	0,001	± 0,003	≤ 3
H303D	150/310	0,001/0,01	Ø 80	0,001/0,008	± 0,003/± 0,02	≤ 3
H423	420	0,001	Ø 80	0,001	± 0,004	≤ 3

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS002)
- Density KIT for solids (CNS001)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)
- Rechargeable battery pack external (CNS015)

⁽¹⁾ Optional external battery pack (CNS015)

⁽²⁾ If connected to optional STAT printer (CNS022)



Optional TLP-50 Label Printer




A fusion of design and quality, I Series balances enclose all the experience of higher class models in a small footprint portable balance. Thanks to the sophisticated software and to a high-performance load cell, these balances reach maximum capacity of 4200 grams. Solid structure, ergonomic keypad and the many embedded software functions make this balance a complete product at a very competitive price, ideal for use in school scientific laboratories.

Features

- High resolution load cell weighing system
- Small footprint
- External calibration
- LCD with backlight with adjustable contrast
- Under hook weighing
- Plastic protection cover

Optional functions

Paper Grammage Function (CNS219)



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
I622	620	0,01	Ø 130	0,01	± 0,02	≤ 2
I1002	1000	0,01	Ø 130	0,01	± 0,02	≤ 2
I1502	1500	0,01	Ø 130	0,01	± 0,02	≤ 2
I2202	2200	0,01	Ø 130	0,01	± 0,03	≤ 3
I3102	3100	0,01	Ø 130	0,01	± 0,03	≤ 3
I4202	4200	0,01	Ø 130	0,01	± 0,04	≤ 3
I5202	5200	0,01	150x140	0,01	± 0,04	≤ 4

Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 190x255x80
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 1,4Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Density KIT for solids and liquids (CNS004)
- Density KIT for solids (CNS003)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)
- Rechargeable battery pack external (CNS015)


⁽¹⁾ Optional external battery pack (CNS015)

⁽²⁾ If connected to optional STAT printer (CNS022)

A fusion of design and quality, L Series balances enclose all the experience of higher class models in a small footprint portable balance. A sophisticated software and a high-performance load cell allow always reliable weighings and fast response. Solid structure, ergonomic keypad and the many embedded software functions make this balance a complete product at a very competitive price.

Features

- High resolution load cell weighing system
- Small footprint
- External calibration
- LCD with backlight with adjustable contrast
- Under hook weighing
- Plastic protection cover



Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 190x255x80
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 1,4Kg

External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
L3201	3200	0,1	150x140	0,05	± 0,2	≤ 2
L5201	5200	0,1	150x140	0,05	± 0,2	≤ 2
L6501	6500	0,1	150x140	0,05	± 0,2	≤ 2

Accessories

- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)
- Rechargeable battery pack external (CNS015)
- Density KIT for solids (CNS003)
- Density KIT for solids and liquids (CNS004)

⁽¹⁾ Optional external battery pack (CNS015)


⁽²⁾ If connected to optional STAT printer (CNS022)



The entry level of balances keeping all the quality of higher level balances. Is the essential for having always precise and reliable results with the minimum investment. The refined design, the small dimensions, the backlit LCD display, the possibility of operating also with AA type batteries (5 pcs) and the many on-board software functions already included make this balance a product with the best quality over price.

Features

- High resolution load cell weighing system
- Small footprint, portable
- External calibration
- LCD with backlight
- Operates also with AA batteries (not included)
- Plastic protection cover



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
M202	200	0,01	Ø 110	0,01	± 0,02	≤ 2
M422	420	0,01	Ø 110	0,01	± 0,02	≤ 2
M1001	1000	0,1	150x140	0,1	± 0,2	≤ 2
M1501	1500	0,1	150x140	0,1	± 0,2	≤ 2
M2201	2200	0,1	150x140	0,1	± 0,3	≤ 2

Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 190x255x80
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 1 Kg

Accessories

- Calibration certificate (CNS0333)

⁽¹⁾ Optional external battery pack (CNS015)



TG - Series balances are moisture balances with large 5" color touchscreen display that gives a user-friendly access to all the balance advanced applications and internal databases. The user has easy and intuitive access with fast programming of drying cycles, thanks to icon-driven menus. This means more efficiency, productivity and interactivity. A double case structure protects the heart of the balance: an aluminum inner case and a composite plastic external case. The many on-board functions already included, the possibility of calibrating the internal thermometer using the optional KIT, up to 6 operating languages, the large 5" inch display and the RS232 serial output close the circle of a complete product, reliable and truly convenient. The models in the family allow reaching up to 0,001% drying resolution.



Technical data

- Span drift (+ 10...+ 30 °C): +/- 3ppm/°C [TGA64M]; +/- 4ppm/°C [other models]
- Dimensions LxWxH (mm): 345x215x235
- Maximum dimension of container on the pan: 100mm (Ø) x 25mm (height)
- Power supply: AC 220-240 V (at request AC 110 Volt) 50/60Hz; plugs EU,UK
- Power consumption: rating 430 VA; Heat source lamp: 400Watt
- Net Weight: 6,1Kg (A64M and 163M)
- Net Weight: 4,7Kg (163L and 62L)

External Calibration

Model	Capacity (g)	Resolution (g)	Moisture Resolution	Pan (mm)	Repeatability (g)	Linearity (g)	Precision (2g)	Response time (sec.)
TGA64M	60	0,0001	0,001%	100mm Samples Pan	0,0001	± 0,0003	0,18%	≤ 3
TG163M	160	0,001	0,01%	100mm Samples Pan	0,001	± 0,003	0,18%	≤ 3
TG163L	160	0,001	0,01%	100mm Samples Pan	0,001	± 0,003	0,20%	≤ 4
TG62L	60	0,01	0,1%	100mm Samples Pan	0,01	± 0,03	0,50%	≤ 3

Accessories

- Thermometer calibration KIT (CNS02)
- Serial Printer TLP-50, with date/time (CNS054)
- TEST pans (Ø 100mm x 0,5mm) (CNS753)
- Ioniser Ion-A15 (CNS0371)
- Calibration certificate (CNS0333)
- Usb pendrive 8Gbyte (CNS020)
- Touchscreen Stylus pen (CNS021)
- Fiber glass test panz Ø 90 (CNS026)

⁽¹⁾ Only TGA64M, TG163M

⁽²⁾ Only TG163L, TG62L



Export/import results and database to USB

Features

- Electromagnetic force restoration weighing system (A64M and 163M)
- High resolution load cell weighing system (163L and 62L)
- Halogen-infrared lamp
- External calibration
- Large 5" color touchscreen 800x480 display
- RS232 serial interface
- Drying resolution 0,001% (-A64M), 0,01% (-163M and -163L), 0,1% (-62L)
- Drying modes: Time mode (1-99 min.), Autostop % or absolute autostop in grams, Manual
- Live Graph of humidity content changing
- Temperature range: 35-160°C, step of 1°C
- Temperature Profiles: Standard, fast, mild, steps
- Results in: Humidity%, Dry residue%, ATRO%, Weight
- Test results complete of full drying cycle Graph
- Up to 10 hot keys for fast recall of drying cycles from internal database
- Default database stored already with more than 30 products
- Saving results with test reports and drying graphic up to 300 records, for each user.
- Customizable settings for up to 10 users with the possibility of password protection.
- Serial output for connection to printer, USB port for export or import database, test results, etc.




Main functions page for easy working



Live color indication for check weighing



Manual tare input

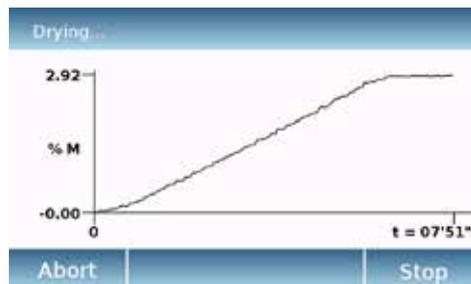

Clear and easy input for GLP function


NEW**T GRAPHIC SERIES - Resolution 0,0001g-0,001g-0,01g**

The new T GRAPHIC - Series are rugged instruments for moisture determination of raw materials and finished samples in the food, cosmetics, ceramics, agriculture and construction industry.

The Dot Matrix graphical display with backlite makes much easier and friendly using the instrument and gives easy and intuitive guidance through the operating process thanks also to his advanced software. On the display are shown all the parameters regarding the drying process and all the relative results, all viewable at once.

This instrument brings features such as one key pressing for starting automatically the last drying cycle memorized or the default one, possibility to print the drying session by interval time set by the user, automatic session starting just by closing the heater etc...

Drying readability are 0,001%, 0,01% and 0,1%. Possibility of calibrating the internal thermometer (with optional KIT CNS02).

**Technical data**

- Span drift (+ 10...+ 30 °C): +/- 3ppm/°C [TA64MG]; +/- 4ppm/°C [other models]
- Dimensions LxWxH (mm): 345x215x235
- Maximum dimension of container on the pan: 100mm (Ø) x 25mm (height)
- Power supply 110-230Vac, 50/60Hz; output 24V 1A 13VA [TA64MG]; output 9V 1,2A 10VA [other models]
- Heater: 230V AC 50/60Hz, 400Watt
- Net Weight: 6,1Kg (TA64MG and T163MG)

External Calibration

Model	Capacity (g)	Resolution (g)	Moisture Resolution	Pan (mm)	Repeatability (g)	Linearity (g)	Precision (2g)	Response time (sec.)
TA64MG	60	0,0001	0,001%	100mm Samples Pan	0,0001	± 0,0003	0,18%	≤ 3
T163MG	160	0,001	0,01%	100mm Samples Pan	0,001	± 0,003	0,18%	≤ 3
T163LG	160	0,001	0,01%	100mm Samples Pan	0,001	± 0,003	0,20%	≤ 4
T62LG	60	0,01	0,1%	100mm Samples Pan	0,01	± 0,03	0,50%	≤ 3


Accessories

- Portable ioniser Ion-A15 (CNS0371)
- Thermometer calibration KIT (CNS02)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial to USB converter (CNS1002)
- Serial cable for output to printer/PC (CNS743)
- Test pans (Ø 100mm x 0,5mm) (CNS753)
- Fiber glass test pans Ø 90mm (CNS026)
- Factory Calibration certificate (CNS0333)




Features

- Electromagnetic force restoration weighing system (TA64MG and T163MG)
- High readability load cell weighing system (T163LG and T62LG)
- Halogen-infrared lamp
- Large Graphic display allows efficient and easy operations
- Date and time indication
- Multilanguage: EN-DE-FR-IT-ES-PT
- GLP/ISO record of last stored calibration data
- Two heating modes: standard and rapid
- Pre-heating on/off
- Time (1-99 min) and Autostop operating modes
- Temperature range: 35-160°C/1°C
- Moisture, dry residue in percentage and ATRO indications
- RS232 serial interface
- View and print the moisture analyzer and heater's last stored calibration data
- Measuring unit g or mg
- Automatic starting of sessions by closing the heater
- Plastic protection cover

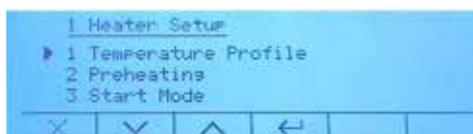


Easy set up of the heater parameters

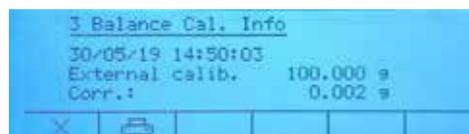

Moisture analyzer calibration data overview



All the parameters all visible at once during drying session

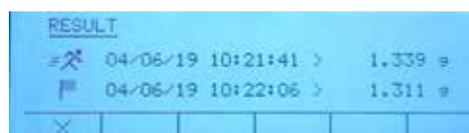

Clear and detailed results view




The JW family of balances was designed for use in jewelry applications. This family includes the Carat Series with high precision and the Gold Series for higher capacity weighing of precious metals. JW balances are all provided with RS232 connectivity; **0.1mg and 1mg models are equipped with a large protection draftshield.**

Features

- Electromagnetic force restoration weighing system
- External or automatic internal calibration
- g/ct swapping button on keypad
- Glass draught shield with 3 sliding doors for easy access to the items being weighed
- 0,01 resolution models are not provided with glass draught shield
- Plastic protection cover



Optional Ioniser model ION-A15



Technical data

- Dimensions LxWxH (mm): 345x215x290 (models 0,1mg and 1mg)
- Weighing chamber LxWxH (mm): 162x171x170 (models 0,1mg and 1mg)
- Dimensions LxWxH (mm): 345x215x100 (models 0,01g)
- Power supply 110-230Vac, 50/60Hz; output 24V 500mA 13VA

External calibration models

- Net Weight 0,1mg: 6,2Kg
- Net Weight 0,001g: 6,2Kg
- Net Weight 0,01g: 4,6Kg

Internal calibration models

- Net Weight 0,1mg: 6,5Kg
- Net Weight 0,001g: 6,5Kg
- Net Weight 0,01g: 5,1Kg

Model	Capacity	Resolution	Pan (mm)	Repeatability	Linearity	Response time (sec.)
Carat series - Automatic internal calibration						
JW124Ai	600ct/120g	0,001ct	Ø 80	0,001ct	± 0,003ct	≤ 4
JW214Ai	1050ct/220g	0,001ct	Ø 80	0,001ct	± 0,003ct	≤ 4
Gold series - Automatic internal calibration						
JW723i	720g	0,001g	Ø 110	0,001g	± 0,002g	≤ 2
JW4202i	4200g	0,01g	Ø 160	0,01g	± 0,04g	≤ 2
Gold series - External calibration						
JW333	330g	0,001g	Ø 110	0,0005g	± 0,002g	≤ 2
JW2202	2200	0,01g	Ø 160	0,01g	± 0,02g	≤ 2

Accessories


- Portable ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Factory Calibration certificate (CNS0333)

Robustness, reliability and a high level of performance are enclosed inside N Series balances, that can reach a maximum capacity of 32Kg and max resolution of 0,1g. The many embedded functions make these balances an ideal instrument of work for many applications inside and outside the laboratory.



Features

- High resolution load cell weighing system
- External calibration
- Metal case
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
N8001	8000	0,1	210x320	0,05	± 0,2	≤ 3
N10001	10000	0,1	210x320	0,05	± 0,3	≤ 3
N12001	12000	0,1	210x320	0,05	± 0,3	≤ 3
N16001	16000	0,1	210x320	0,05	± 0,3	≤ 3
N20001	20000	0,1	210x320	0,1	± 0,3	≤ 4
N32001	32000	0,1	210x320	0,1	± 0,4	≤ 4
N32001.2	32000	0,2	210x320	0,1	± 0,4	≤ 3
N32001.5	32000	0,5	210x320	0,5	± 0,5	≤ 3

Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 330x325x105
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 6,2Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Optional external battery pack (CNS015)


⁽²⁾ If connected to optional STAT printer (CNS022)

Robustness, reliability and a high level of performance are enclosed inside N Series balances, that can reach a maximum capacity of 32Kg and max resolution of 0,1g. The many embedded functions make these balances an ideal instrument of work for many applications inside and outside the laboratory.



Features

- High resolution load cell weighing system
- External calibration
- Metal case
- LCD with backlight with adjustable contrast
- Plastic protection cover
- Under hook weighing



External Calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
N15000	15000	1	210x320	0,1	± 1	≤ 3
N20000	20000	1	210x320	0,1	± 1	≤ 3
N32000	32000	1	210x320	0,1	± 1	≤ 3
N16001D	4500/16000	0,1/1	210x320	0,05/0,5	±0,2/± 1	≤ 3
N20001D	4500/20000	0,1/1	210x320	0,05/0,5	±0,2/± 1	≤ 3
N32001D	4500/32000	0,1/1	210x320	0,05/0,5	±0,2/± 1	≤ 3

Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 330x325x105
- Power supply 110-230Vac, 50/60Hz; output 9V 1,2A 10VA
- Net Weight: 6,2Kg

Accessories

- Ioniser Ion-A15 (CNS0371)
- Serial Printer TLP-50, with date/time (CNS054)
- Serial Printer DPP-250 (CNS007)
- Serial Printer STAT, with Statistics functions (CNS022)
- Portable rechargeable battery pack (CNS015)
- Alphanumeric external keyboard (CNS005)
- Serial to USB converter (CNS1002)
- Serial cable for serial output to printer or PC (CNS743)
- Calibration certificate (CNS0333)
- Communication KIT for balances (CNS0476)

⁽¹⁾ Optional external battery pack (CNS015)

⁽²⁾ If connected to optional STAT printer (CNS022)

TS-iDens - Balance for Density Index



TS-iDens is a Balance for density calculation, in particular it is designed to easily determine the Density Index of a solid sample without need of any computer software or external database.

All-in-one product

With TS-iDens, calculating the density index is easy and fast. Without the necessity to connect the balance to computer for using a specific software, all the data and results can be seen directly in the large screen of the balance, with the possibility to print also all the data with an optional printer.

The strenght of technology

TS-iDens is derived from the sophisticated M5 balances family and therefore takes full advantage of all the strenghts of this series, that is, the large 5" color display, the touchscreen interface and the icon-driven menus, which make your work, respectively, intuitive, efficient and user-friendly.

Database

As reference liquid for the density etermination of the solid sample, the balance has already stored in the database the density values (at different temperatures) of distilled water or Ethanol so that one less thing for the user to care about; of course the user can use whatever other liquid as reference, provided its density value is known or calculated (thanks to the optional liquid density kit).

Density values of the reference liquid (distilled water or Ethanol) used during density etermination of the solid sample are stored in the internal database. The user can choose another liquid as reference, provided its density value is known or he calculates (thanks to the optional liquid density kit).



Automatic internal calibration

Model	Capacity (g)	Resolution (g)	Pan (mm)	Repeatability (g)	Linearity (g)	Response time (sec.)
TS-iDens	3100	0,01	80	0,01	± 0,02	≤ 2

Technical data

- Span drift (+ 10...+ 30 °C): +/- 6ppm/°C
- Dimensions LxWxH (mm): 215 x 345 x 300
- Power supply 110-230Vac. 50/60Hz, output 24V 1A 13VA
- Net Weight: 7 / 8,5 Kg

GLP

Internal Clock, date/time make work easier while GLP capability allow user to record Sample name, Project names and Balance ID, for traceability.

Internal calibration

As standard feature this balance has internal automatic calibration, to ensure daily accurate measurements also during flow of time or conditions changing. User can also choose to switch to external calibration, using his calibration weight value.

Multi-language and Multiuser

Choice of language among English, French, German, Italian, Spanish, Portuguese. rotection of own settings, preferences and database is ensured by the multi-user structure with password protection. The user has easy and intuitive access to all the functions thanks to the icon-driven menus. This means more efficiency, productivity and interactivity. A double case structure protects the heart of the balance: an aluminum inner case and a composite plastic external case.

TS-iDens - Balance for Density Index

Density Index


In foundries, especially for aluminium casting plants, the quality of molten metals is very important to assure the quality of the final cast product. In fact defects created during the melting stage (due to solid and gaseous impurities) could create problems to the final microstructure of the cast. Density index value of a metal sample is an index of how clean is the metal sample and how much free from pores that may have formed during the melting process. By measuring the density index (DI) of the metal, it is possible to control and optimize the process of production of the cast, improving the overall quality of final metal product, and thus drastically reducing rejection rate.



Touchscreen interface screen shots




User can start a function or recall data from (internal) database.

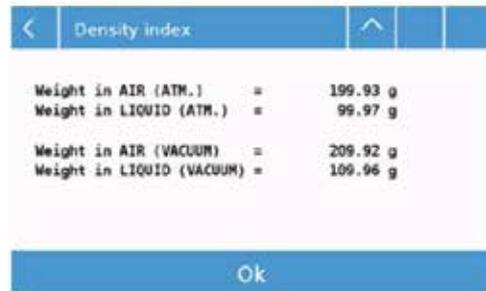

Clear report of Density Index calculation is shown.



Instructions on the large display drive the user.

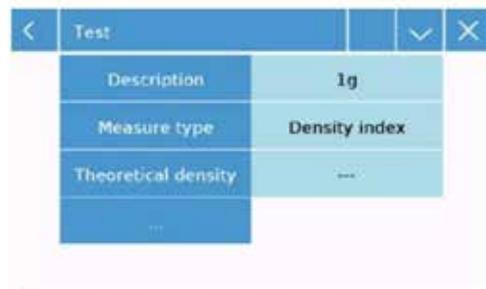

Easy and intuitive menu to insert data.

CNS007



Portable thermal printer DPP-250 (cable version)

DPP-250 and printer is a small footprint portable printer that can be used with OPTIKA laboratory balances. Weight values are printed quickly and sharply. The internal rechargeable battery grants mobility. Printer DPP-250 is supplied with connection cable to be connected directly to OPTIKA balances.

Type	Line Thermal printer
Print width	48mm (384dots/line)
Print speed	Up to 80mm/sec
Battery	Rechargeable battery (Li-Ion 7.4V, 1150mAh). Battery charge time: 2 hours. 20 000 lines with one charge
Paper roll	Width 57mm
External power supply unit (included)	AC 100 to 240 V, 50 to 60 Hz, DC 9 V/1 A
Interface	- RS232 for DPP-250
Operating temperature	5 - 40°C
Humidity	Max 85% relative (not condensing)
Dimensions	66 x 105 x 57h mm
Weight	295g (excl. paper roll)
Connection cable	Included for DPP-250

CNS022



Serial printer STAT

STAT printer is a thermal printer that can be used with OPTIKA laboratory balances. It can print weight values and, when requested, a full statistical analysis of the values including: number of values, mean values, sum, minimum, maximum, standard deviation, etc.. The printer can also record and print date/time and calibration details in compliance with GLP. Printer is supplied with connection cable to be connected directly to balances.

Features:

- Count and total of all measurements, Minimum, Maximum values, Range (Max-Min)
- Average value, Standard deviation
- GLP Record keeping of balance calibration with date/time print
- Available units: mg, g, Kg, pcs
- Languages: English, French, German

Type	Bidirectional RS-232 Thermal printer
Print speed	0,75 lines/sec ; 40/80 characters/line
Paper roll	Width 112mm, lenght 20m
External power supply unit (included)	230V 50Hz 0,12A / 9V DC 1,3A
Energy consumption (average)	min 0.5A (4W) - max 1.1A (9W)
Baud rate	1200-2400-4800-9600 Baud
Operating temperature	5 - 35°C
Humidity	Max 80% relative (not condensing)
Working life	5000 hours or 500000 lines
Dimensions	165 x 140 x 50 mm
Weight	450 g (excl. paper roll)
Connection cable	Included

ACCESSORIES

CNS054



Line thermal dot printer TLP-50

TLP-50 printer is a compact printer that can be used with OPTIKA laboratory balances. This printer has internal clock so it can print date/time together with weight values. Paper type is label.

Type	Line thermal dot printing
Print width	54mm (432 dots)
Print resolution	203 x 203 dpi
Print speed	50mm/sec
Prints	Date/time
Paper type	Thermal paper rolls Label rolls
Paper roll	Width 58mm
External power supply unit (included)	AC 100-240 V, 50/60 Hz, DC 12V /2.5A
Interface	RS-232C
Operating temperature	5 - 40°C
Humidity	Max 85% relative (not condensing)
Dimensions	106 x 184 x 110h mm
Weight	950g (incl. power supply)

CNS010-CNS011-CNS012-CNS025



Paper rolls for printers

CODE	MODEL
CNS010	Roll of 54x24mm labels (500) for CNS054
CNS011	Roll of paper for CNS054
CNS012	Roll of paper for CNS007
CNS025	Roll for CNS022

CNS005



Alphanumeric external keyboard model

External keyboard for inserting alphanumeric values into the balances. With TARE function button and manual pre-tare value inserting button.

Interface	RS232
Dimensions	115x210x35h mm
Weight	250 g

CNS027



Draft Shield rear panel with integrated ioniser

To neutralize static charges on samples to weigh. The user can easily and quickly mount this panel on a balance already in his possession, upgrading the balance with an integrated ioniser. The ioniser is easily activated by pressing a button. There are two ways of operating: 2 minutes or continuously for max 8 hours.

Suitable for following families:

- Semimicro 0,01 mg balances
- Analytical 0,1 mg balances
- CH and CGH 1 mg balances
- EH and EGH 1 mg balances

Includes:

rear panel with integrated ioniser, power supply.

CNS0371



Ioniser model ION-A15, for all balances

Static charges accumulate in many kind of samples that are being weighed during the laboratory routine. By blowing ions, the portable Ionizer ION-A15 neutralizes static electricity on charged samples like plastic parts, containers or films. Within seconds the sample is ready to be weighted free from static charges giving the operator accurate results.

The Ionizer ION-A15 is small and light, easy to transport and use everywhere in the laboratory.

Distance sample-ion source	about 5-40 cm
Discharge time	9s/5cm, 13s/10cm, 100s/40cm (with fan turned on)
Ozone concentration	0-0.05 ppm (2cm from ion source)
Maximum air volume	0.06 cm ³ /min
Ambient conditions	0-50°C, 20-80% air humidity (non-condensing)
AC adapter (primary)	AC 100-240V, 50/60Hz
Dimensions	11 x 10,5 x 4,5 cm
Weight	310 g
Installation site	device may be only used indoors

CNS02



Thermometer calibration KIT

Small, fast-response thermometer for verify and calibrate the heating source of OPTIKA moisture Analyzers T Series & TG Series. A calibrated moisture analyzer's heater allows to have always accurate results. Essential for application where are required certified results.

Temperature range	40...+200°C
Resolution	1°C
Precision	+/-2°C
Diameter	Ø 46 mm
Indicator casing	AISI 304
Box Dimensions	200x210x60h mm; weight 260g

ACCESSORIES

CNS0476



Communication KIT for balances

Complete kit to connect OPTIKA balances to a computer. It allows data collection, Statistics, creation of graphs and export results to Excel file.

The software included allows to perform all the functions of the balance from the PC such as Piececount, Density, Peak hold, Limits set etc...from your computer.

The Kit includes:

- RS232-to-USB converter
- Serial cable
- i-Weight Software for data collection and analysis

Operating systems: Windows 7, 8, 10 (32&64bit)

NOT compatible with OPTIKA moisture analyzers.

CNS015



Portable rechargeable battery pack

Portable Li-Ion rechargeable battery pack. Can connect and power balances for outdoor use or for enhance the portability of the balance.

Input	9/12V
Output	5V 2100mA x 2 USB and 1xDC 9V/12V 2000mA
Battery charge time	5 hours
Battery duration	40 hours about (depends on use and on the device connected)
Charge status indication	By 4 LEDs
Capacity	10000mAh/37Wh
Dimensions	120x80x23mm
Weight	304g

CNS001 - Density KIT for solids (res. 0,01mg/0,0001g/0,001g)

CNS002 - Density KIT for solids and liquids (res. 0,01mg/0,0001g/0,001g)

CNS003 - Density KIT for solids (res. 0,01g/0,1g not available for M series)

CNS004 - Density KIT for solids and liquids (res. 0,01g/0,1g not available for M series)



Density KIT for solids and liquids

Density KIT for density calculation of SOLIDS and LIQUIDS for OPTIKA balances with resolution 0,1mg/0,001g/0,01g.

It contains:

2 Glass graduated Beaker: height 150mm Ø 50mm 250ml and height 95mm Ø 65 mm 250ml

Analogic thermometer 10°C - 40°C/1°C

Glass Plummet

Basket for floating and not floating samples

Suspension arm for basket or plummet

Support for plummet/basket

Support base for beaker

ACCESSORIES

CNS753



Aluminum Test pans for moisture analyzers

Aluminium sample dishes are essential for using with moisture analyzers. Reusable, diameter 100mm, thickness 0.5mm. One box contains 80 pans.



CNS026



Glass fiber discs for moisture analyzers

Glass fibre discs are used when analysing liquids and semi solid samples. They are used in conjunction with the aluminium test disc code CNS753 (see photo on left). It ensures accurate results when testing samples that contain large amounts of liquid and prevent liquid splashing during the sample drying process. It also facilitate a better distribution of heat throughout the sample. Diameter 90mm. One box contains 200 discs.

CNS1002 - CNS743 - CNS744

Communication cables



CODE	MODEL
CNS1002	RS232/USB converter balance/PC
CNS743	Serial cable 9pins M/M for serial output printer/PC
CNS744	Serial cable 9pins M/F for serial output PC

Protection cover



Protection covers replacement are available on request for all the models.

ACCESSORIES

CNS0290



**Certificate of Origin
(must be requested when
order is placed)**

CNS0333



**Factory Calibration
certificate
(request together with the
order)**

CNS020



USB pendrive 8 Gigabyte

CNS021



**Stylus pen for touchscreen
monitor**

CALIBRATION WEIGHTS



CODE	MASS	CLASS	MATERIAL
PS020E1	20g	E1	Stainless steel
PS020E2	20g	E2	Stainless steel
PS020F1	20g	F1	Stainless steel
PS100E1	100g	E1	Stainless steel
PS100E2	100g	E2	Stainless steel
PS100F1	100g	F1	Stainless steel
PS200E1	200g	E1	Stainless steel
PS200E2	200g	E2	Stainless steel
PS200F1	200g	F1	Stainless steel
PS500E1	500g	E1	Stainless steel
PS500E2	500g	E2	Stainless steel
PS500F1	500g	F1	Stainless steel
PS1F1	1kg	F1	Stainless steel
PS2F1	2kg	F1	Stainless steel
PS2F2	2kg	F2	Stainless steel
PS5E2	5kg	E2	Stainless steel
PS5F1	5kg	F1	Stainless steel
PS5F2	5kg	F2	Stainless steel
PS5M1	5kg	M1	Stainless steel
PS10F1	10kg	F1	Stainless steel
PS10F2	10kg	F2	Stainless steel
PSGN10M1	10kg	M1	Nickel cast iron

┌ Distributor ┐

└

┐

└

Headquarters and Manufacturing Facilities

OPTIKA S.r.l.

Via Rigla, 30 - 24010 Ponteranica (BG) - ITALIA - Tel.: +39 035.571.392 - info@optika-italy.com - www.optika-italy.com
